



Continuous lines of light

Concord Mini Continuum II - Upgrade

Mini Continuum II introduces a uniquely clean, simple LED lighting system offering continuous, highly uniform lines of light across walls and ceilings. This highly versatile lighting tool can be recessed, semi-recessed, surface mounted or suspended, either vertically or horizontally.

Available as direct/indirect or direct only distribution - both of which can be interconnected. Every batten has a plug and socket arrangement for easy and rapid electrical installation.

Mini Continuum II direct is available in two versions: one with an outside trim detail for plasterboard ceilings; and a trimless version for when a seamless effect is required. Dimmable DALI versions and 3-hours non-maintained integral emergency options are available as standard options.

All versions are available in white (RAL9016) or black (RAL9005) finishing colour.

Mini Continuum II - Direct/Indirect - Suspended Kit



Standalone pendant version of Mini Continuum II range, with direct/indirect light distribution. Minimalist design based on the Golden mean or ratio; regarded as the secret to aesthetics. Ideal for offices, meeting rooms, corridors, education facilities, museums and libraries.


Features

- Mini Continuum II provides perfectly clean Direct/Indirect distribution, 65% downward light, 35% upward light
- The DALI versions can be installed as standard on/off switchable
- Direct/Indirect separate switching via DALI
- Suspended kit versions are pre-wired and supplied complete with end caps and suspension cables
- Colour rendering index, Ra >80
- IR/UV free light source without heat radiation
- LED Colour consistency (initial MacAdam) between luminaires ≤ 3 SDCM
- IK03 impact resistance level
- IP20 ingress protection level
- Lifespan L90B50 50,000hrs
- Electrical safety class I (EN 61140)
- High quality aluminium body with matte white (RAL9016) or Black (RAL9005) finishing colour
- Opal and Prismatic diffuser options
- Prismatic version is ideal for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1
- Available as an option with 3 hours Emergency
- Ta35 °C on emergency & Ta40 °C on non-emergency versions

Product information

| Code | Description | Finish | Fixture Power (W) | Luminous Flux (lm) | Efficacy (lm/W) | Colour Temp (K) | CRI | Dimmable | Control Technology |
|--|-------------------------------------|--------|-------------------|--------------------|-----------------|-----------------|-----|----------|--------------------|
| Mini Continuum II - Direct/Indirect - Suspended Kit | | | | | | | | | |
| Micro Prismatic Diffuser | | | | | | | | | |
| 3000K | | | | | | | | | |
| 2071461 | MC2 D/I KIT 1.2M 3K DALI WHT PRIS | White | 29 | 3,750 | 129 | 3,000 | >80 | Yes | DALI |
| 2071462 | MC2 D/I KIT 2.4M 3K DALI WHT PRIS | White | 58 | 7,500 | 129 | 3,000 | >80 | Yes | DALI |
| 2071561 | MC2 D/I KIT 1.2M 3K DALI BLK PRIS | Black | 29 | 3,750 | 129 | 3,000 | >80 | Yes | DALI |
| 2071562 | MC2 D/I KIT 2.4M 3K DALI BLK PRIS | Black | 58 | 7,500 | 129 | 3,000 | >80 | Yes | DALI |
| 4000K | | | | | | | | | |
| 2071463 | MC2 D/I KIT 1.2M 4K DALI WHT PRIS | White | 29 | 3,850 | 133 | 4,000 | >80 | Yes | DALI |
| 2071464 | MC2 D/I KIT 2.4M 4K DALI WHT PRIS | White | 58 | 7,700 | 133 | 4,000 | >80 | Yes | DALI |
| 2071563 | MC2 D/I KIT 1.2M 4K DALI BLK PRIS | Black | 29 | 3,850 | 133 | 4,000 | >80 | Yes | DALI |
| 2071564 | MC2 D/I KIT 2.4M 4K DALI BLK PRIS | Black | 58 | 7,700 | 133 | 4,000 | >80 | Yes | DALI |
| Opal Diffuser | | | | | | | | | |
| 4000K | | | | | | | | | |
| 2071465 | MC2 D/I KIT 1.2M 4K DALI WHT OPAL | White | 29 | 4,050 | 140 | 4,000 | >80 | Yes | DALI |
| 2071466 | MC2 D/I KIT 2.4M 4K DALI WHT OPAL | White | 58 | 8,100 | 140 | 4,000 | >80 | Yes | DALI |
| 2071467 | MC2 D/I KIT 1.2M 4K DALIEM WHT OPAL | White | 30 | 4,050 | 135 | 4,000 | >80 | Yes | DALI |
| 2071468 | MC2 D/I KIT 2.4M 4K DALIEM WHT OPAL | White | 59 | 8,100 | 137 | 4,000 | >80 | Yes | DALI |
| 2071565 | MC2 D/I KIT 1.2M 4K DALI BLK OPAL | Black | 29 | 4,050 | 140 | 4,000 | >80 | Yes | DALI |
| 2071566 | MC2 D/I KIT 2.4M 4K DALI BLK OPAL | Black | 58 | 8,100 | 140 | 4,000 | >80 | Yes | DALI |
| 2071567 | MC2 D/I KIT 1.2M 4K DALIEM BLK OPAL | Black | 30 | 4,050 | 135 | 4,000 | >80 | Yes | DALI |
| 2071568 | MC2 D/I KIT 2.4M 4K DALIEM BLK OPAL | Black | 59 | 8,100 | 137 | 4,000 | >80 | Yes | DALI |


Mini Continuum II - Direct/Indirect - Suspended Kit



Additional Images




Photometric Data

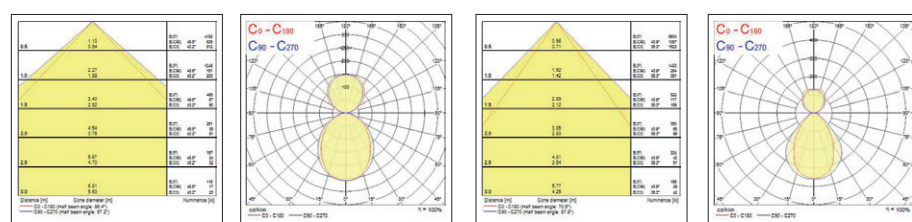

Opal

Prismatic

Dimensions (mm)



Mini Continuum II - Direct/Indirect - Modular System



Continuous version of Mini Continuum II for creating perfectly clean horizontal lines of homogenous light with no shadows where both direct and indirect light distribution required. Minimalist design based on the Golden mean or ratio; regarded as the secret to aesthetics. Ideal for offices, meeting rooms, corridors, education facilities, museums and libraries

Features

- Direct/Indirect distribution, 65% downward light, 35% upward light
- The DALI versions can be installed as standard on/off switchable
- Direct/Indirect separate switching via DALI
- End caps, suspensions and connector accessories to be ordered separately
- Colour rendering index, Ra >80
- IR/UV free light source without heat radiation
- LED Colour consistency (initial MacAdam) between luminaries ≤3 SDCM
- IK03 impact resistance level
- IP20 ingress protection level
- Lifespan L90B50 50,000hrs
- Electrical safety class I (EN 61140)
- High quality aluminium body with matte white (RAL9016) or Black (RAL9005) finishing colour
- Opal and Prismatic diffuser options
- Prismatic version is ideal for office areas (UGR ≤ 19) and environments with computer screens in accordance with EN 12464-1
- Available as an option with 3 hours Emergency
- Ta35 °C on emergency & Ta40 °C on non-emergency versions


Product information

| Code | Description | Finish | Fixture Power (W) | Luminous Flux (lm) | Efficacy (lm/W) | Colour Temp (K) | CRI | Dimmable | Control Technology |
|---|---------------------------------|--------|-------------------|--------------------|-----------------|-----------------|-----|----------|--------------------|
| Mini Continuum II - Direct/Indirect - Modular System | | | | | | | | | |
| Micro Prismatic Diffuser | | | | | | | | | |
| 3000K | | | | | | | | | |
| 2071451 | MC2 D/I 1.2M 3K DALI WHT PRIS | White | 29 | 3,750 | 129 | 3,000 | >80 | Yes | DALI |
| 2071452 | MC2 D/I 2.4M 3K DALI WHT PRIS | White | 58 | 7,500 | 129 | 3,000 | >80 | Yes | DALI |
| 2071551 | MC2 D/I 1.2M 3K DALI BLK PRIS | Black | 29 | 3,750 | 129 | 3,000 | >80 | Yes | DALI |
| 2071552 | MC2 D/I 2.4M 3K DALI BLK PRIS | Black | 58 | 7,500 | 129 | 3,000 | >80 | Yes | DALI |
| 4000K | | | | | | | | | |
| 2071453 | MC2 D/I 1.2M 4K DALI WHT PRIS | White | 29 | 3,850 | 133 | 4,000 | >80 | Yes | DALI |
| 2071454 | MC2 D/I 2.4M 4K DALI WHT PRIS | White | 58 | 7,700 | 133 | 4,000 | >80 | Yes | DALI |
| 2071553 | MC2 D/I 1.2M 4K DALI BLK PRIS | Black | 29 | 3,850 | 133 | 4,000 | >80 | Yes | DALI |
| 2071554 | MC2 D/I 2.4M 4K DALI BLK PRIS | Black | 58 | 7,700 | 133 | 4,000 | >80 | Yes | DALI |
| Opal Diffuser | | | | | | | | | |
| 3000K | | | | | | | | | |
| 2071455 | MC2 D/I 1.2M 3K DALI WHT OPAL | White | 29 | 3,900 | 134 | 3,000 | >80 | Yes | DALI |
| 2071456 | MC2 D/I 2.4M 3K DALI WHT OPAL | White | 58 | 7,800 | 134 | 3,000 | >80 | Yes | DALI |
| 2071555 | MC2 D/I 1.2M 3K DALI BLK OPAL | Black | 29 | 3,900 | 134 | 3,000 | >80 | Yes | DALI |
| 2071556 | MC2 D/I 2.4M 3K DALI BLK OPAL | Black | 58 | 7,800 | 134 | 3,000 | >80 | Yes | DALI |
| 4000K | | | | | | | | | |
| 2071457 | MC2 D/I 1.2M 4K DALI WHT OPAL | White | 29 | 4,050 | 140 | 4,000 | >80 | Yes | DALI |
| 2071458 | MC2 D/I 2.4M 4K DALI WHT OPAL | White | 58 | 8,100 | 140 | 4,000 | >80 | Yes | DALI |
| 2071459 | MC2 D/I 1.2M 4K DALIEM WHT OPAL | White | 30 | 4,050 | 135 | 4,000 | >80 | Yes | DALI |
| 2071460 | MC2 D/I 2.4M 4K DALIEM WHT OPAL | White | 59 | 8,100 | 137 | 4,000 | >80 | Yes | DALI |
| 2071557 | MC2 D/I 1.2M 4K DALI BLK OPAL | Black | 29 | 4,050 | 140 | 4,000 | >80 | Yes | DALI |
| 2071558 | MC2 D/I 2.4M 4K DALI BLK OPAL | Black | 58 | 8,100 | 140 | 4,000 | >80 | Yes | DALI |
| 2071559 | MC2 D/I 1.2M 4K DALIEM BLK OPAL | Black | 30 | 4,050 | 135 | 4,000 | >80 | Yes | DALI |
| 2071560 | MC2 D/I 2.4M 4K DALIEM BLK OPAL | Black | 59 | 8,100 | 137 | 4,000 | >80 | Yes | DALI |


Mini Continuum II - Direct/Indirect - Modular System




Additional Images

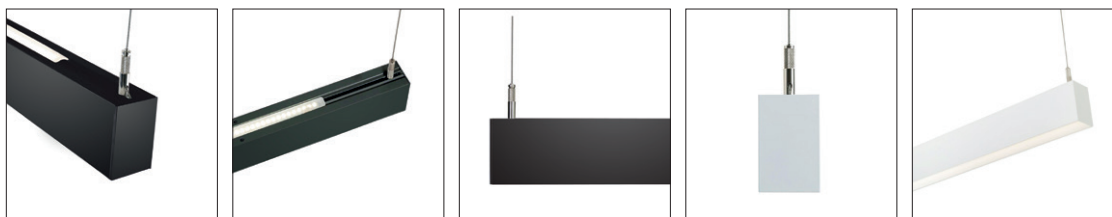



Photometric Data




Opal



Prismatic



Dimensions (mm)



Mini Continuum II - Direct - Suspended Kit



Standalone pendant version of Mini Continuum II range, with direct light distribution. Minimalist design based on the Golden mean or ratio; regarded as the secret to aesthetics. Ideal for offices, meeting rooms, corridors, education facilities, museums and libraries.

Features

- Direct light distribution
- The DALI versions can be installed as standard on/off switchable
- Suspended kit versions are pre-wired and supplied complete with end caps and suspension cables
- Colour rendering index, Ra >80
- IR/UV free light source without heat radiation
- LED Colour consistency (initial MacAdam) between luminaires ≤3 SDCM
- IK03 impact resistance level
- IP20 ingress protection level
- Lifespan L90B50 50,000hrs
- Electrical safety class I (EN 61140)
- High quality aluminium body with matte white (RAL9016) or Black (RAL9005) finishing colour
- Opal and Prismatic diffuser options
- Available as an option with 3 hours Emergency
- Ta35 °C on emergency & Ta40 °C on non-emergency versions

Product information

| Code | Description | Finish | Fixture Power (W) | Luminous Flux (lm) | Efficacy (lm/W) | Colour Temp (K) | CRI | Dimmable | Control Technology |
|---|---------------------------------|--------|-------------------|--------------------|-----------------|-----------------|-----|----------|--------------------|
| Mini Continuum II - Direct - Suspended Kit | | | | | | | | | |
| Micro Prismatic Diffuser | | | | | | | | | |
| 4000K | | | | | | | | | |
| 2071469 | MC2 KIT 1.2M 4K DALI WHT PRIS | White | 18 | 2,300 | 128 | 4,000 | >80 | Yes | DALI |
| 2071470 | MC2 KIT 2.4M 4K DALI WHT PRIS | White | 36 | 4,600 | 128 | 4,000 | >80 | Yes | DALI |
| 2071471 | MC2 KIT 1.2M 4K DALIEM WHT PRIS | White | 19 | 2,300 | 121 | 4,000 | >80 | Yes | DALI |
| 2071472 | MC2 KIT 2.4M 4K DALIEM WHT PRIS | White | 37 | 4,600 | 124 | 4,000 | >80 | Yes | DALI |
| 2071569 | MC2 KIT 1.2M 4K DALI BLK PRIS | Black | 18 | 2,300 | 128 | 4,000 | >80 | Yes | DALI |
| 2071570 | MC2 KIT 2.4M 4K DALI BLK PRIS | Black | 36 | 4,600 | 128 | 4,000 | >80 | Yes | DALI |
| 2071571 | MC2 KIT 1.2M 4K DALIEM BLK PRIS | Black | 19 | 2,300 | 121 | 4,000 | >80 | Yes | DALI |
| 2071572 | MC2 KIT 2.4M 4K DALIEM BLK PRIS | Black | 37 | 4,600 | 124 | 4,000 | >80 | Yes | DALI |
| Opal Diffuser | | | | | | | | | |
| 3000K | | | | | | | | | |
| 2071473 | MC2 KIT 1.2M 3K DALI WHT OPAL | White | 18 | 2,300 | 128 | 3,000 | >80 | Yes | DALI |
| 2071474 | MC2 KIT 2.4M 3K DALI WHT OPAL | White | 36 | 4,600 | 128 | 3,000 | >80 | Yes | DALI |
| 2071573 | MC2 KIT 1.2M 3K DALI BLK OPAL | Black | 18 | 2,300 | 128 | 3,000 | >80 | Yes | DALI |
| 2071574 | MC2 KIT 2.4M 3K DALI BLK OPAL | Black | 36 | 4,600 | 128 | 3,000 | >80 | Yes | DALI |
| 4000K | | | | | | | | | |
| 2071475 | MC2 KIT 1.2M 4K DALI WHT OPAL | White | 18 | 2,400 | 133 | 4,000 | >80 | Yes | DALI |
| 2071476 | MC2 KIT 2.4M 4K DALI WHT OPAL | White | 36 | 4,800 | 133 | 4,000 | >80 | Yes | DALI |
| 2071477 | MC2 KIT 1.2M 4K DALIEM WHT OPAL | White | 19 | 2,400 | 126 | 4,000 | >80 | Yes | DALI |
| 2071478 | MC2 KIT 2.4M 4K DALIEM WHT OPAL | White | 37 | 4,800 | 130 | 4,000 | >80 | Yes | DALI |
| 2071575 | MC2 KIT 1.2M 4K DALI BLK OPAL | Black | 18 | 2,400 | 133 | 4,000 | >80 | Yes | DALI |
| 2071576 | MC2 KIT 2.4M 4K DALI BLK OPAL | Black | 36 | 4,800 | 133 | 4,000 | >80 | Yes | DALI |
| 2071577 | MC2 KIT 1.2M 4K DALIEM BLK OPAL | Black | 19 | 2,400 | 126 | 4,000 | >80 | Yes | DALI |
| 2071578 | MC2 KIT 2.4M 4K DALIEM BLK OPAL | Black | 37 | 4,800 | 130 | 4,000 | >80 | Yes | DALI |


Mini Continuum II - Direct - Suspended Kit




Additional Images





Photometric Data





Opal



Prismatic



Dimensions (mm)

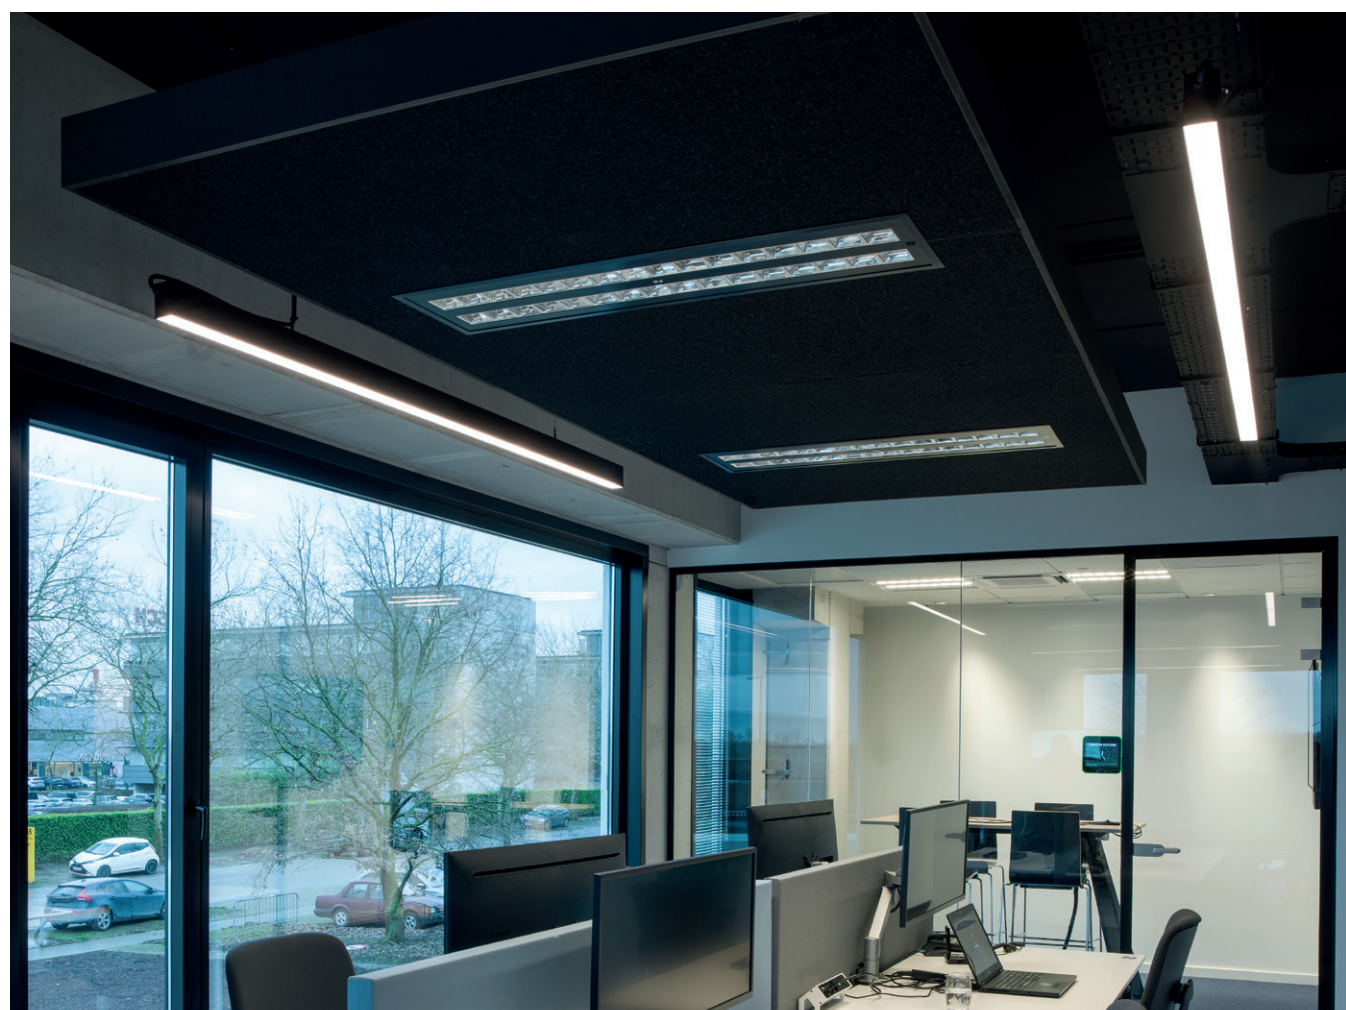

Mini Continuum II - Direct - Trimless Modular System



Continuous version of Mini Continuum II for creating perfectly clean horizontal and vertical lines of homogenous light with no shadows where only direct light distribution required. Minimalist design based on the Golden mean or ratio; regarded as the secret to aesthetics. Ideal for offices, meeting rooms, corridors, education facilities, museums and libraries. This versatile solution can be recessed, semi-recessed, surface-mounted or suspended; either horizontally or vertically.

Features

- Direct light distribution
- Trimless for a seamless finish
- The DALI versions can be installed as standard on/off switchable
- End caps and connector accessories to be ordered separately
- Colour rendering index, Ra >80
- IR/UV free light source without heat radiation
- LED Colour consistency (initial MacAdam) between luminaries ≤3 SDCM
- IK03 impact resistance level
- IP20 ingress protection level
- Lifespan L90B50 50,000hrs
- Electrical safety class I (EN 61140)
- High quality aluminium body with matte white (RAL9016) or Black (RAL9005) finishing colour
- Opal and Prismatic diffuser options
- Available as an option with 3 hours Emergency
- Ta35 °C on emergency & Ta40 °C on non-emergency versions


Product information

| Code | Description | Finish | Fixture Power (W) | Luminous Flux (lm) | Efficacy (lm/W) | Colour Temp (K) | CRI | Dimmable | Control Technology |
|--|-----------------------------|--------|-------------------|--------------------|-----------------|-----------------|-----|----------|--------------------|
| Mini Continuum II - Direct - Trimless Modular | | | | | | | | | |
| Opal Diffuser | | | | | | | | | |
| 3000K | | | | | | | | | |
| 2071479 | MC2 1.2M 3K DALI WHT OPAL | White | 18 | 2,300 | 128 | 3,000 | >80 | Yes | DALI |
| 2071480 | MC2 2.4M 3K DALI WHT OPAL | White | 36 | 4,600 | 128 | 3,000 | >80 | Yes | DALI |
| 2071579 | MC2 1.2M 3K DALI BLK OPAL | Black | 18 | 2,300 | 128 | 3,000 | >80 | Yes | DALI |
| 2071580 | MC2 2.4M 3K DALI BLK OPAL | Black | 36 | 4,600 | 128 | 3,000 | >80 | Yes | DALI |
| 4000K | | | | | | | | | |
| 2071482 | MC2 1.2M 4K DALI WHT OPAL | White | 18 | 2,400 | 133 | 4,000 | >80 | Yes | DALI |
| 2071483 | MC2 2.4M 4K DALI WHT OPAL | White | 36 | 4,800 | 133 | 4,000 | >80 | Yes | DALI |
| 2071485 | MC2 1.2M 4K DALIEM WHT OPAL | White | 19 | 2,400 | 126 | 4,000 | >80 | Yes | DALI |
| 2071486 | MC2 2.4M 4K DALIEM WHT OPAL | White | 37 | 4,800 | 130 | 4,000 | >80 | Yes | DALI |
| 2071582 | MC2 1.2M 4K DALI BLK OPAL | Black | 18 | 2,400 | 133 | 4,000 | >80 | Yes | DALI |
| 2071583 | MC2 2.4M 4K DALI BLK OPAL | Black | 36 | 4,800 | 133 | 4,000 | >80 | Yes | DALI |
| 2071585 | MC2 1.2M 4K DALIEM BLK OPAL | Black | 19 | 2,400 | 126 | 4,000 | >80 | Yes | DALI |
| 2071586 | MC2 2.4M 4K DALIEM BLK OPAL | Black | 37 | 4,800 | 130 | 4,000 | >80 | Yes | DALI |



Mini Continuum II - Direct - Trimless Modular System




Additional Images

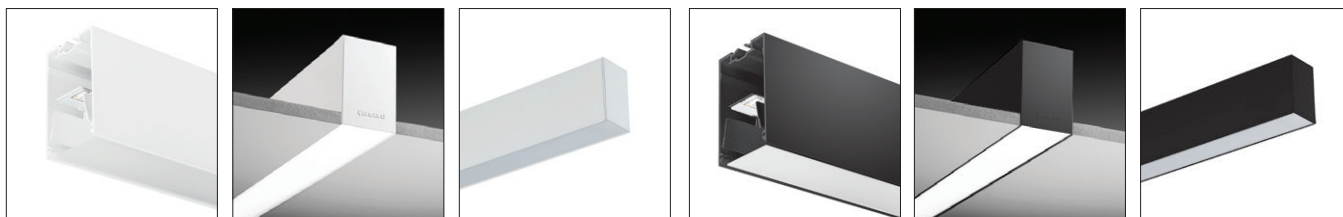

Photometric Data



Dimensions (mm)



Mini Continuum II - Direct - Trim Modular System



Recessed continuous version of Mini Continuum II for creating perfectly clean horizontal and vertical lines of homogenous light with no shadows. Minimalist design based on the Golden mean or ratio; regarded as the secret to aesthetics. Ideal for offices, meeting rooms, corridors, education facilities, museums and libraries. This versatile solution can be recessed; either horizontally or vertically.


Features

- Direct light distribution
- Trim version with an outside detail for plasterboard ceilings
- The DALI versions can be installed as standard on/off switchable
- End caps and connector accessories to be ordered separately
- Colour rendering index, Ra >80
- IR/UV free light source without heat radiation
- LED Colour consistency (initial MacAdam) between luminaires ≤ 3 SDCM
- IK03 impact resistance level
- IP20 ingress protection level
- Lifespan L90B50 50,000hrs
- Electrical safety class I (EN 61140)
- High quality aluminium body with matte white (RAL9016) or Black (RAL9005) finishing colour
- Opal and Prismatic diffuser options
- Available as an option with 3 hours Emergency
- Ta35 °C on emergency & Ta40 °C on non-emergency versions

Product information

| Code | Description | Finish | Fixture Power (W) | Luminous Flux (lm) | Efficacy (lm/W) | Colour Temp (K) | CRI | Dimmable | Control Technology |
|---|----------------------------------|--------|-------------------|--------------------|-----------------|-----------------|-----|----------|--------------------|
| Mini Continuum II - Direct - Trim Modular System | | | | | | | | | |
| Opal Diffuser | | | | | | | | | |
| 3000K | | | | | | | | | |
| 2071488 | MC2 TRIM 1.2M 3K DALI WHT OPAL | White | 18 | 2,300 | 128 | 3,000 | >80 | Yes | DALI |
| 2071489 | MC2 TRIM 2.4M 3K DALI WHT OPAL | White | 36 | 4,600 | 128 | 3,000 | >80 | Yes | DALI |
| 2071588 | MC2 TRIM 1.2M 3K DALI BLK OPAL | Black | 18 | 2,300 | 128 | 3,000 | >80 | Yes | DALI |
| 2071589 | MC2 TRIM 2.4M 3K DALI BLK OPAL | Black | 36 | 4,600 | 128 | 3,000 | >80 | Yes | DALI |
| 4000K | | | | | | | | | |
| 2071491 | MC2 TRIM 1.2M 4K DALI WHT OPAL | White | 18 | 2,400 | 133 | 4,000 | >80 | Yes | DALI |
| 2071492 | MC2 TRIM 2.4M 4K DALI WHT OPAL | White | 36 | 4,800 | 133 | 4,000 | >80 | Yes | DALI |
| 2071494 | MC2 TRIM 1.2M 4K DALIEM WHT OPAL | White | 19 | 2,400 | 126 | 4,000 | >80 | Yes | DALI |
| 2071495 | MC2 TRIM 2.4M 4K DALIEM WHT OPAL | White | 37 | 4,800 | 130 | 4,000 | >80 | Yes | DALI |
| 2071591 | MC2 TRIM 1.2M 4K DALI BLK OPAL | Black | 18 | 2,400 | 133 | 4,000 | >80 | Yes | DALI |
| 2071592 | MC2 TRIM 2.4M 4K DALI BLK OPAL | Black | 36 | 4,800 | 133 | 4,000 | >80 | Yes | DALI |
| 2071594 | MC2 TRIM 1.2M 4K DALIEM BLK OPAL | Black | 19 | 2,400 | 126 | 4,000 | >80 | Yes | DALI |
| 2071595 | MC2 TRIM 2.4M 4K DALIEM BLK OPAL | Black | 37 | 4,800 | 130 | 4,000 | >80 | Yes | DALI |

Additional Images

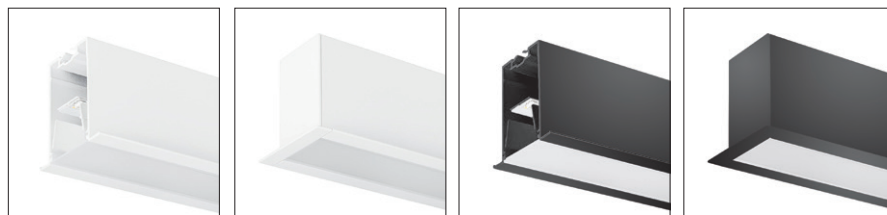

Mini Continuum II - Accessories

| Code | Description |
|--|---|
| Mini Continuum II - Accessories | |
| 2054910 | MC2 TRIMLESS END CAP WHT |
| 2055310 | MC2 TRIMLESS END CAP BLK |
| 2054912 | MC2 TRIM END CAP WHT |
| 2055312 | MC2 TRIM END CAP BLK |
| 2093183 | MC2 90DEG HORIZ-CORNER EL WHT OPAL |
| 2093184 | MC2 90DEG VERTI-CORNER EL WHT OPAL |
| 2093185 | MC2 TRIM 90DEG HORIZ-CORNER EL WHT OPAL |
| 2093155 | MC2 90DEG HORIZ-CORNER WHT OPAL |
| 2093156 | MC2 90DEG VERTI-CORNER WHT OPAL |
| 2093157 | MC2 TRIM 90DEG HORIZ-CORNER WHT OPAL |
| 2071683 | MC2 90DEG HORIZ-CORNER EL BLK OPAL |
| 2071684 | MC2 90DEG VERTI-CORNER EL BLK OPAL |
| 2071685 | MC2 TRIM 90DEG HORIZ-CORNER EL BLK OPAL |
| 2071655 | MC2 90DEG HORIZ-CORNER BLK OPAL |
| 2071656 | MC2 90DEG VERTI-CORNER BLK OPAL |
| 2071657 | MC2 TRIM 90DEG HORIZ-CORNER BLK OPAL |
| 2054914 | MC2 MECH JOINER & GASKET |
| 2055115 | WIREABLE 5 WAY MAINS CONNECTOR NON-DIMMING |
| 2055380 | MC2 WIREABLE5WAY MAINS+DALI |
| 2054909 | MC2 PLASTERBOARD BRKT |
| 2035031 | 3000MM SINGLE WIRE SUSPENSION MECHANICAL - CHROME |



2093183/2093155



2093184/2093156



2093185/2093157



2071683/2071655



2071684/2071656



2071685/2071657



2054910/2055310




2054912/2055312



2055115/205380




2054909




2054914

Photometric Data

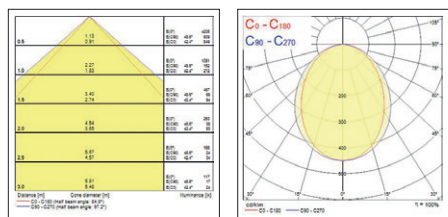

Dimensions (mm)





Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft October 2024

sylvania-lighting.com

A Feilo Sylvania Company