



Seamless linkable linear LED light

SylPipe



The new generation of Sylvania's SylPipe range of luminaires have been designed for simple linear light applications, creating direct or indirect illumination within a room. The design of the luminaire allows seamless linking and you can connect in up to a 10 meter continuous run.

Each SylPipe comes with fixings including optional tilting mounting brackets. A range of accessories are available separately; connector cables for linking around corners and 1.5m plugged cable.

sylvania-lighting.com

Features

- LED batten (T5 batten equivalent) 1000lm/m / 1500lm/m ideal for cove lighting and secondary illumination
- Available in 300 / 600 / 900 / 1,200 / 1,500mm length models
- Uniform light distribution
- Highly efficient: delivers up to 125lm/W (total system efficiency)
- Warm white (3,000K) or cool white (4,000K)
- Integrated driver, direct input 220-240V
- High-quality robust Polycarbonate extrusion tube
- Seamless linking - up to 10m runs
- Easy installation by mounting brackets (2 non-tiltable + 2 tiltable included)
- Low maintenance with 30,000 hours life expectancy

Product information


Code	Description	Correlated Colour Temperature (K)	Colour Rendering Index	Nominal Beam Angle (°)	Fixture Lumen (lm)	Total Power Consumption (W)	Efficiency (lm/W)	Product Length (mm)	Product Width (mm)	Product Height (mm)	Voltage (V AC)
SylPipe											
0090051	SylPipe L300 500lm 830 High Output	3000	80	120	500	4	125	300	24	35	220-240
0090052	SylPipe L600 950lm 830 High Output	3000	80	120	950	8	119	600	24	35	220-240
0090053	SylPipe L900 1300lm 830 High Output	3000	80	120	1300	11	118	900	24	35	220-240
0090054	SylPipe L1200 1800lm 830 High Output	3000	80	120	1800	15	120	1200	24	35	220-240
0090055	SylPipe L1500 2200lm 830 High Output	3000	80	120	2200	19	116	1500	24	35	220-240
0090056	SylPipe L300 500lm 840 High Output	4000	80	120	500	4	125	300	24	35	220-240
0090057	SylPipe L600 950lm 840 High Output	4000	80	120	950	8	119	600	24	35	220-240
0090058	SylPipe L900 1300lm 840 High Output	4000	80	120	1300	11	118	900	24	35	220-240
0090059	SylPipe L1200 1800lm 840 High Output	4000	80	120	1800	15	120	1200	24	35	220-240
0090060	SylPipe L1500 2200lm 840 High Output	4000	80	120	2200	19	116	1500	24	35	220-240
0090063	SylPipe L1200 1800lm 830 Top Entry HO	3000	80	120	1800	15	120	1200	24	35	220-240

Additional images



Photometric Data

SylPipe L1200 HO



Code	Description	Housing Colour
Accessories		
0051387	SylPipe CONNECTING CABLE 3 PACK	White
0051388	SylPipe UK CABLE ACC	White
0051389	SylPipe EUROPE CABLE ACC	White
0051390	SylPipe Tilttable bracket	White
0051391	SylPipe Non-Tilttable bracket	White



0051387



0051388



0051389



0051390




0051391



0051391



Dimensions (mm)

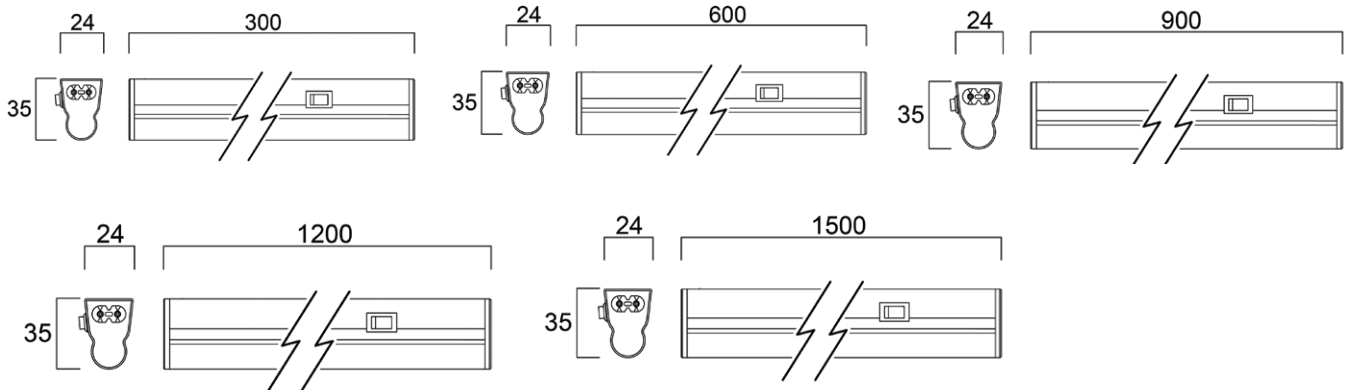

SYLVANIA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited.

Copyright Feilo Sylvania International Group Kft. November 2022

sylvania-lighting.com

A Feilo Sylvania Company